



## OS120L/OS132 INSTRUCTIONS

### Frame Assembly –

Assemble frame laying down as shown in Picture 1.

Align the letters on the tubes with there corresponding tube to ensure proper assembly. (A to A, B to B etc.)


### Screen Assembly –

**Note** – Care should be taken to prevent the screen from getting dirty during assembly. This is easier with two people. The screen assembly should be done with the frame laying down.

First locate one of the upper corners of the screen. The adjustable straps should be on the right side of the frame. The logo should be on the bottom center facing forward.

Starting at the top, attach the clips over the tubes. It is easiest to start at a corner and work around. See Picture 2.

Attach 2 guy ropes to each of the rings on the top of the frame.




With 2 people stand the assembled screen upright.

Stake the screen frame to the ground using the 4 stakes provided.



Using the supplied guy wires and stakes secure the frame to prevent it from moving around in windy conditions or tipping over.

Once the frame is staked down, the adjustable straps on the right and bottom edges can be adjusted to minimize the wrinkles in the screen.

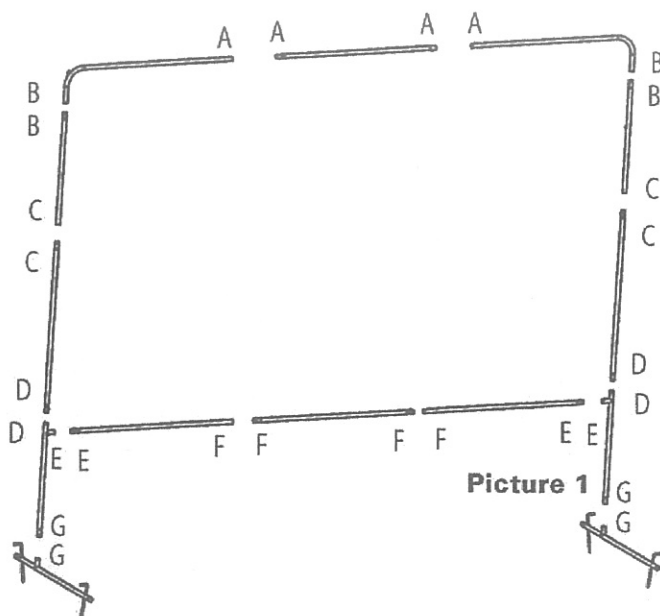

Picture 1

Attach 2  
Guy Ropes

Attach 2  
Guy Ropes

Adjustable  
Straps

Picture 2

Logo

Adjustable  
Straps



1612 N Broad Street  
Lansdale, Pa 19446  
(215) 362 - 7368

44 W Ridge Pike  
Limerick, Pa 19468  
(610) 489 - 2334